

FIG.1



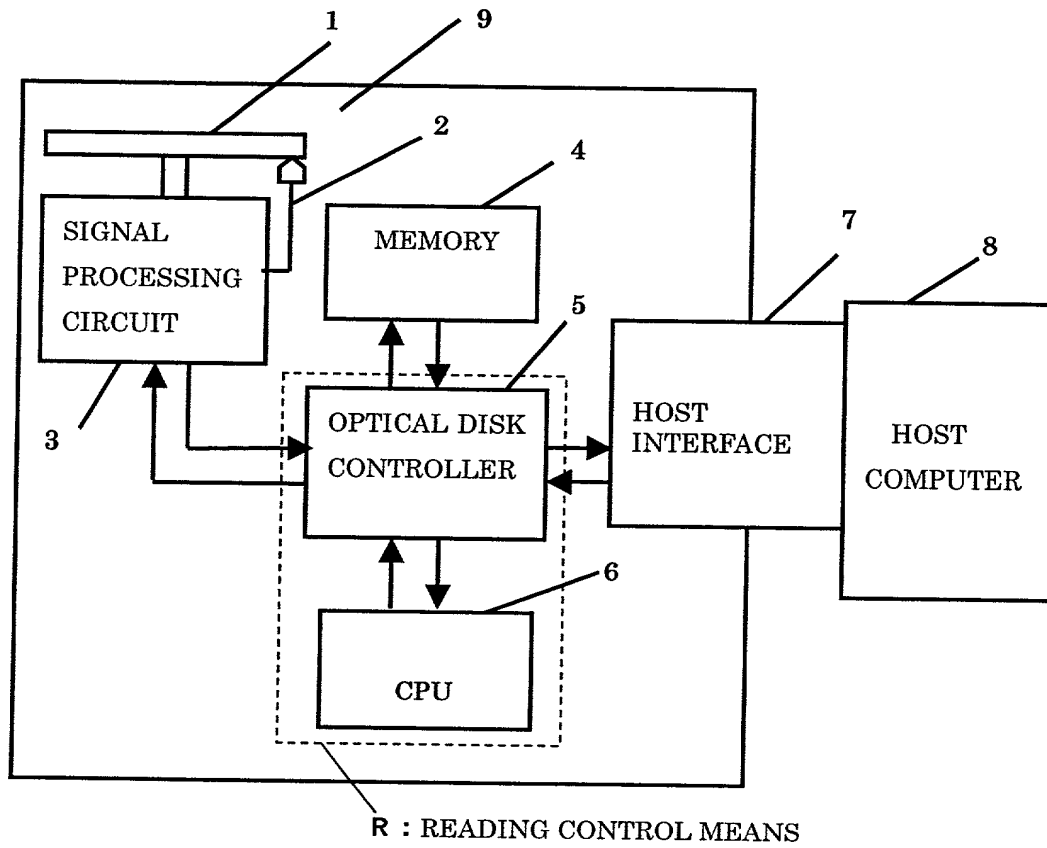


FIG.2

(A)

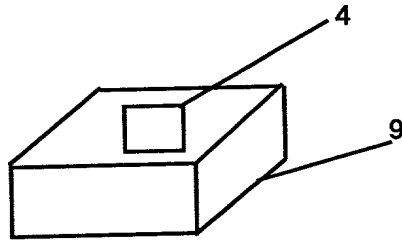

(B)

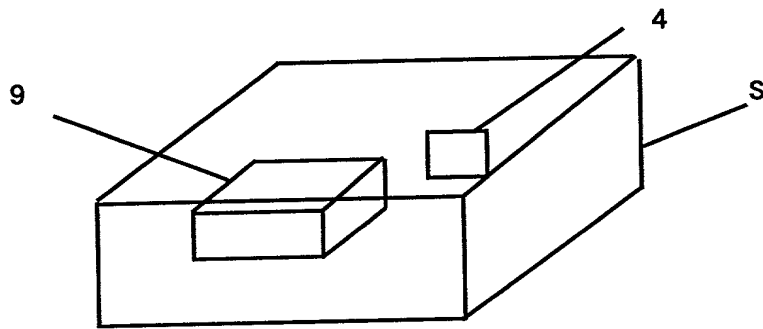

(C)


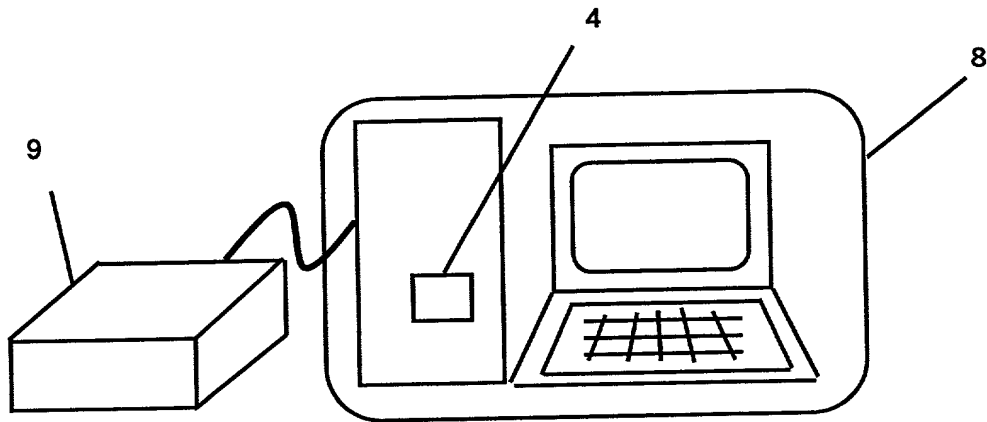


FIG.3

(A)

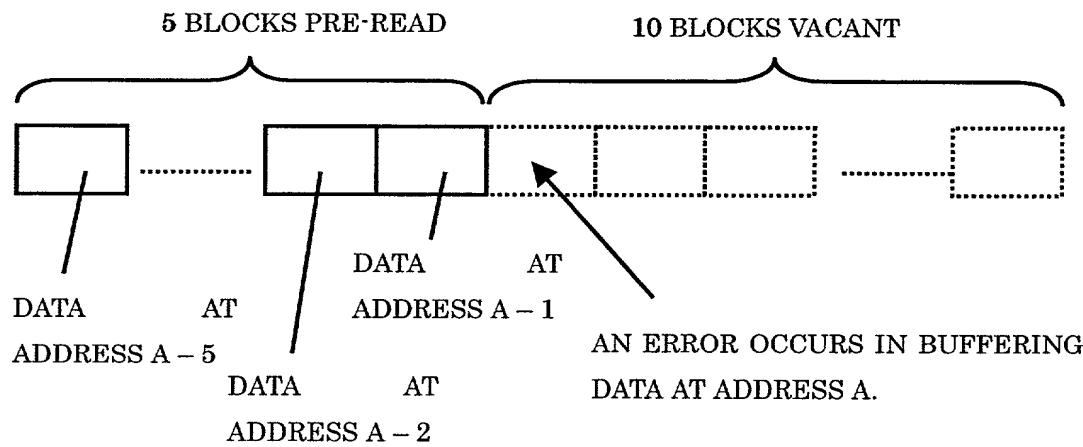

(B)

DEFECTIV BLOCK LIST

SLR FLAG	ADDRESS OF DEFECTIVE BLOCK	ADDRESS OF ALTERNATIVE BLOCK
0	ADDRESS α	ADDRESS β
1	ADDRESS A	NO ALTERNATIVE BLOCK AVAILABLE
1	ADDRESS A + 4	NO ALTERNATIVE BLOCK AVAILABLE
1	ADDRESS A + 12	NO ALTERNATIVE BLOCK AVAILABLE

①
②

⋮

FIG.4

(A)) READ COMMAND

TYPE	OFFSET	DETAILS
COMMAND	0	CODE VALUE TO INDICATE READ COMMAND
PARAMETER	1	OPTION CODE
	2	
	3	BUFFER PAGE ADDRESS
	4	
	5	NUMBER OF PAGES PROCESSED
	6	
	7	HEAD ADDRESS
	8	
	9	
	10	

(B)) SDL SETTING COMMAND

TYPE	OFFSET	DETAILS
COMMAND	0	CODE VALUE TO INDICATE SDL SETTING COMMAND
PARAMETER	1	OPTION CODE
	2	
	3	PDL POINTER
	4	
	5	
	6	SDL POINTER
	7	
	8	

FIG.5

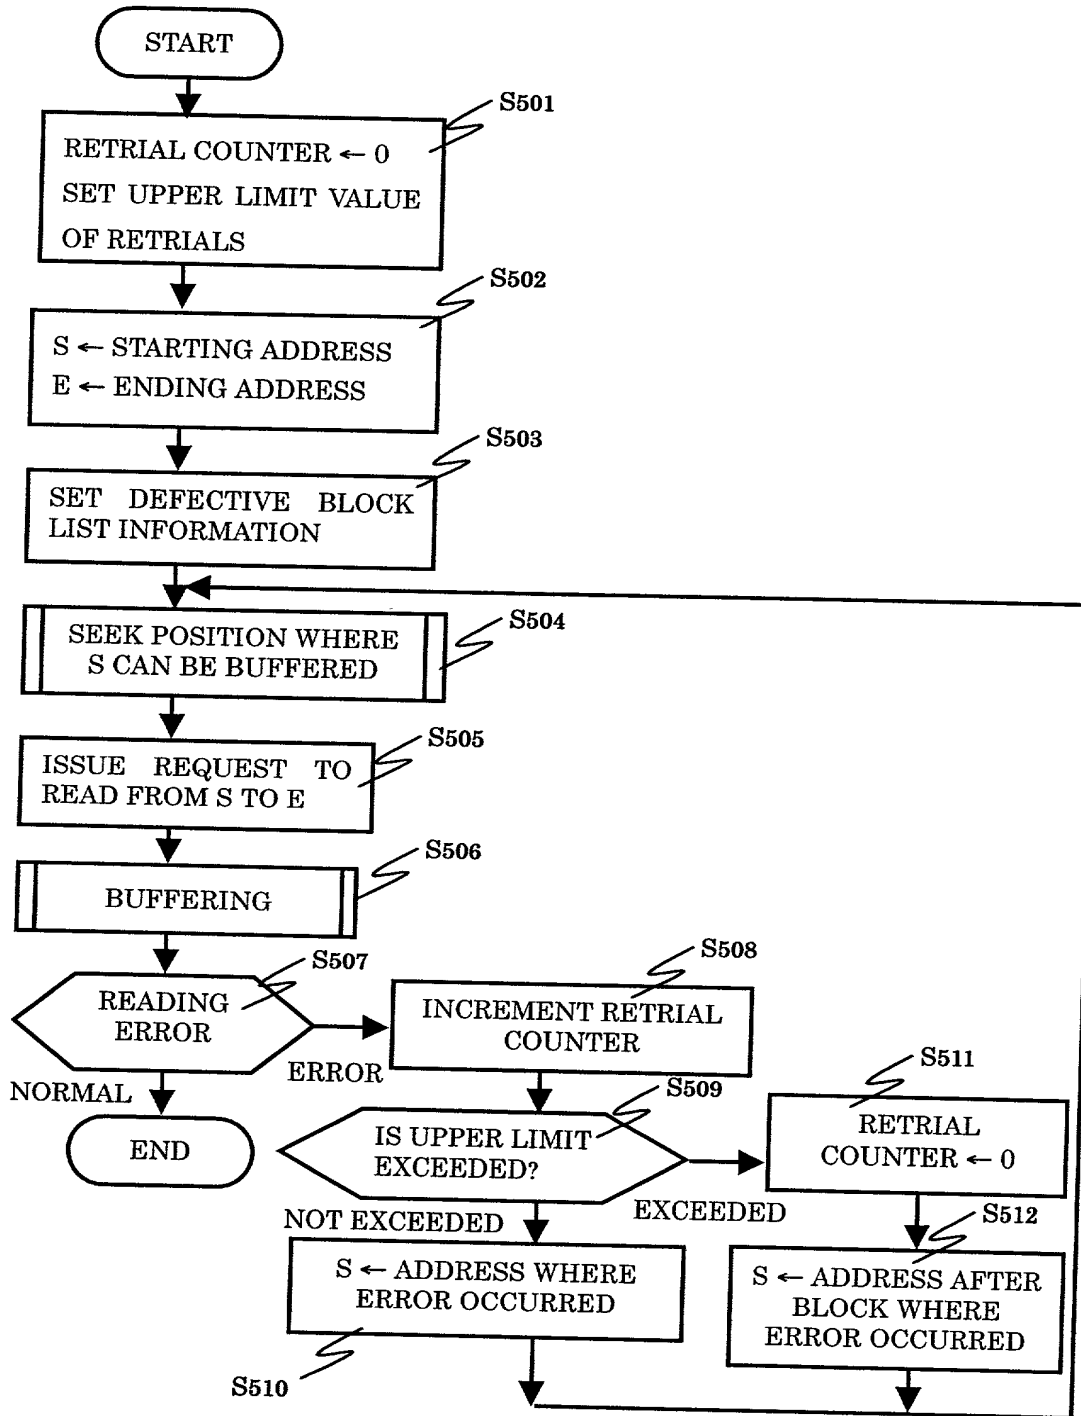


FIG.6

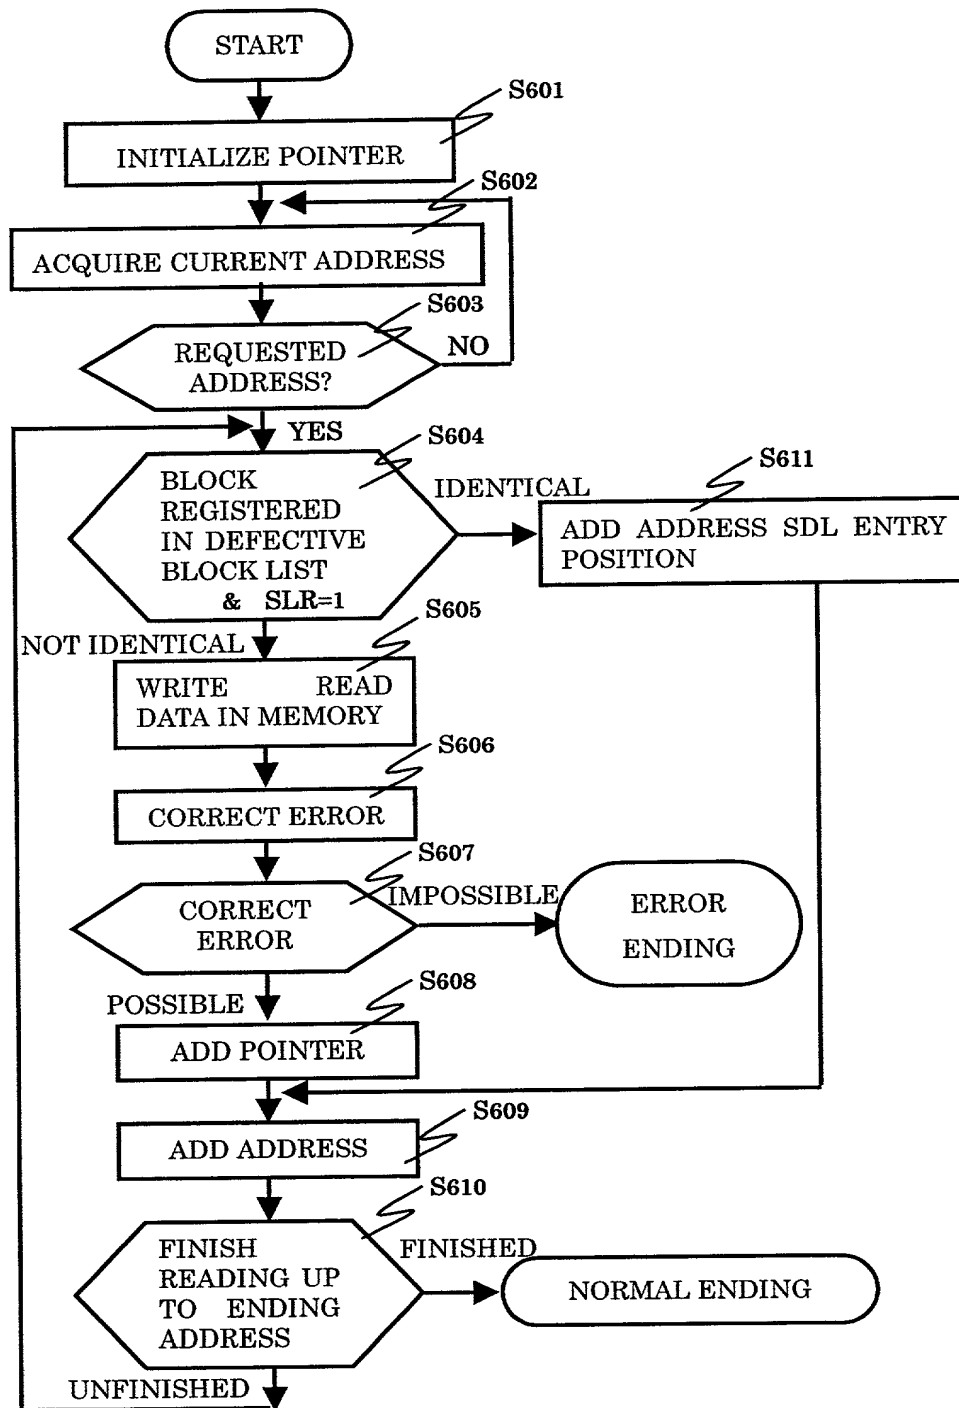


FIG. 7

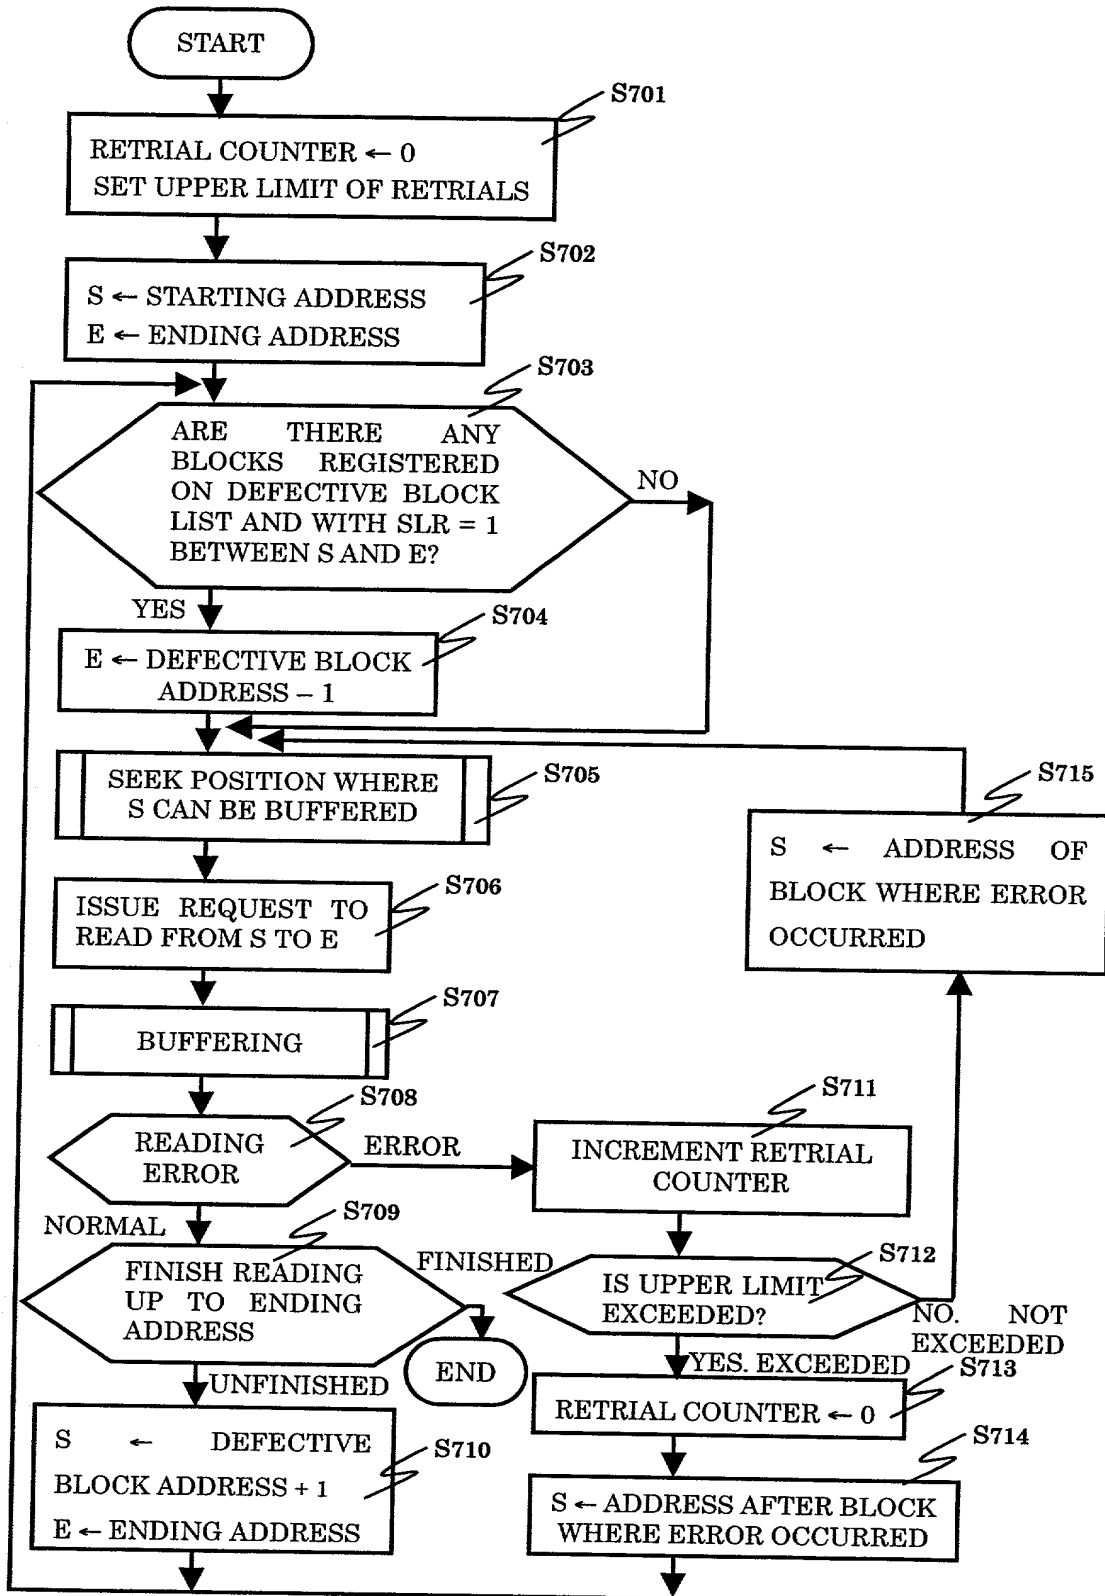


FIG.8

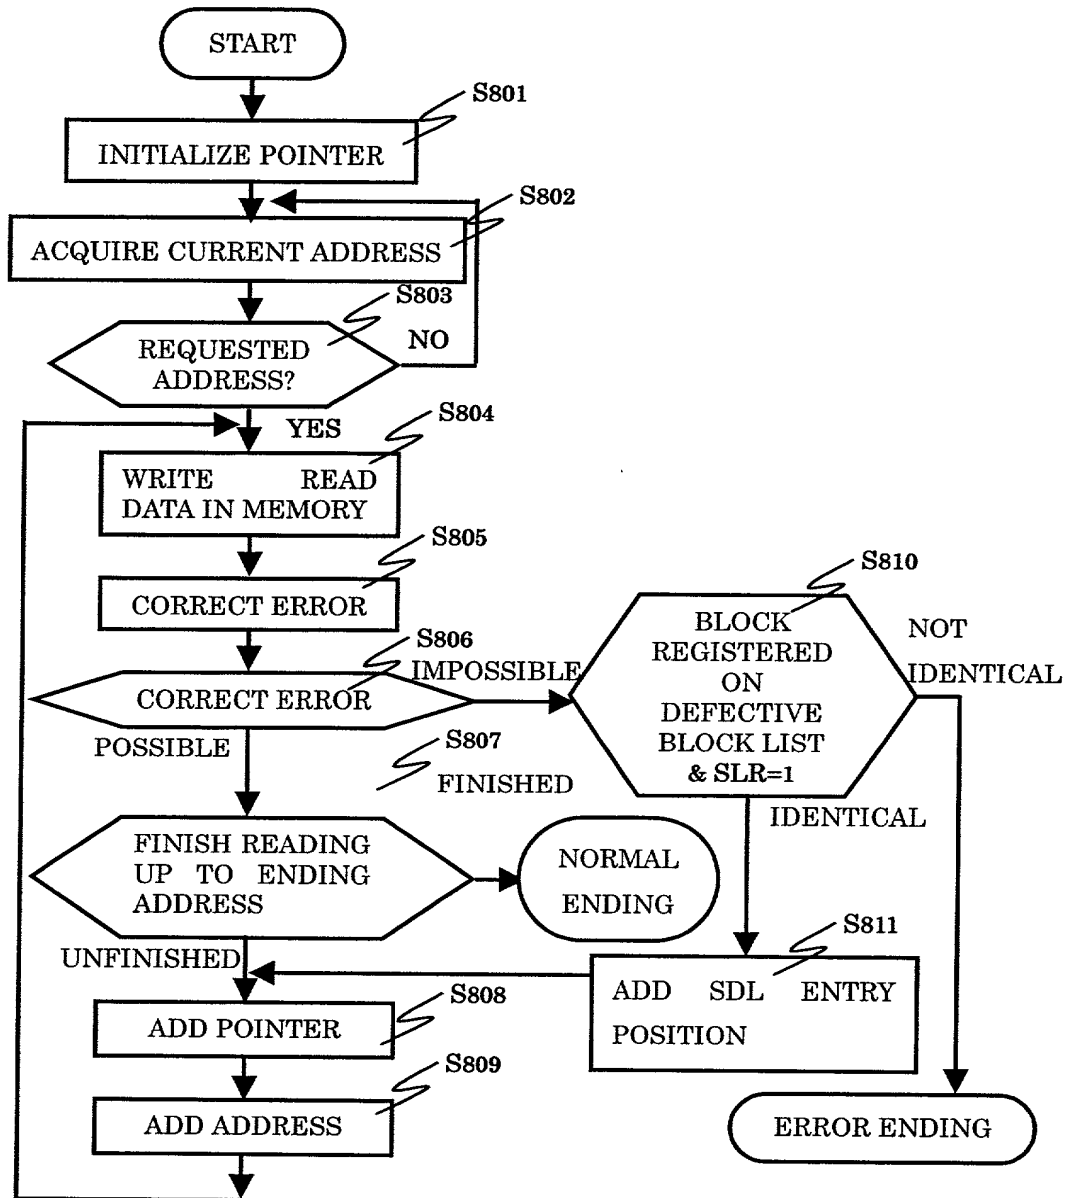


FIG.9

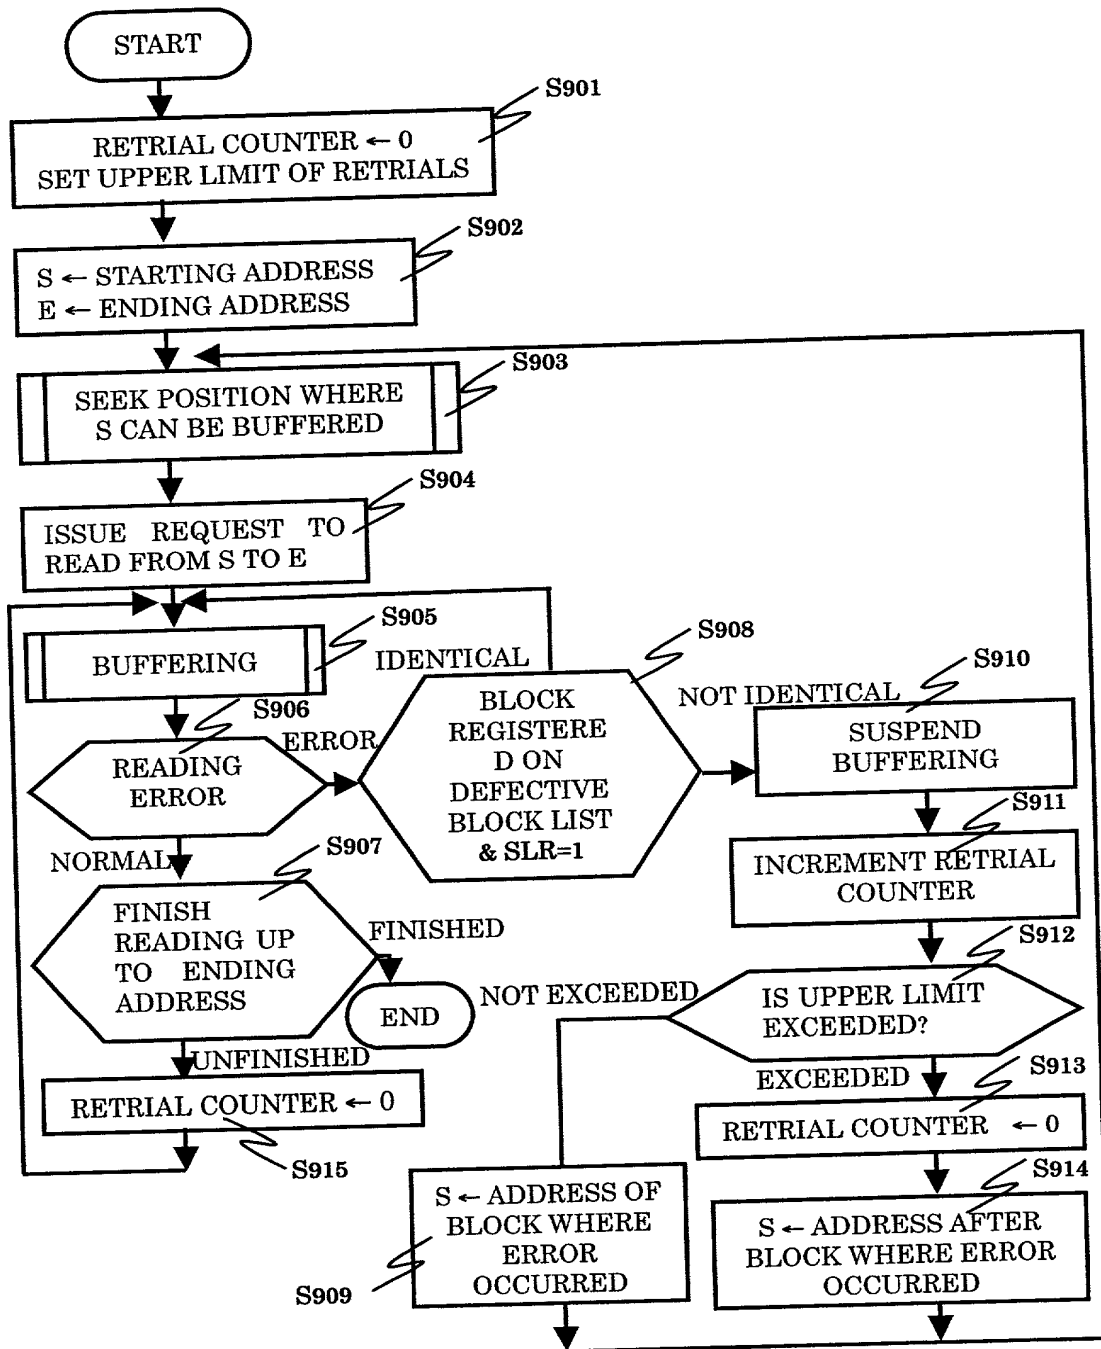


FIG.10

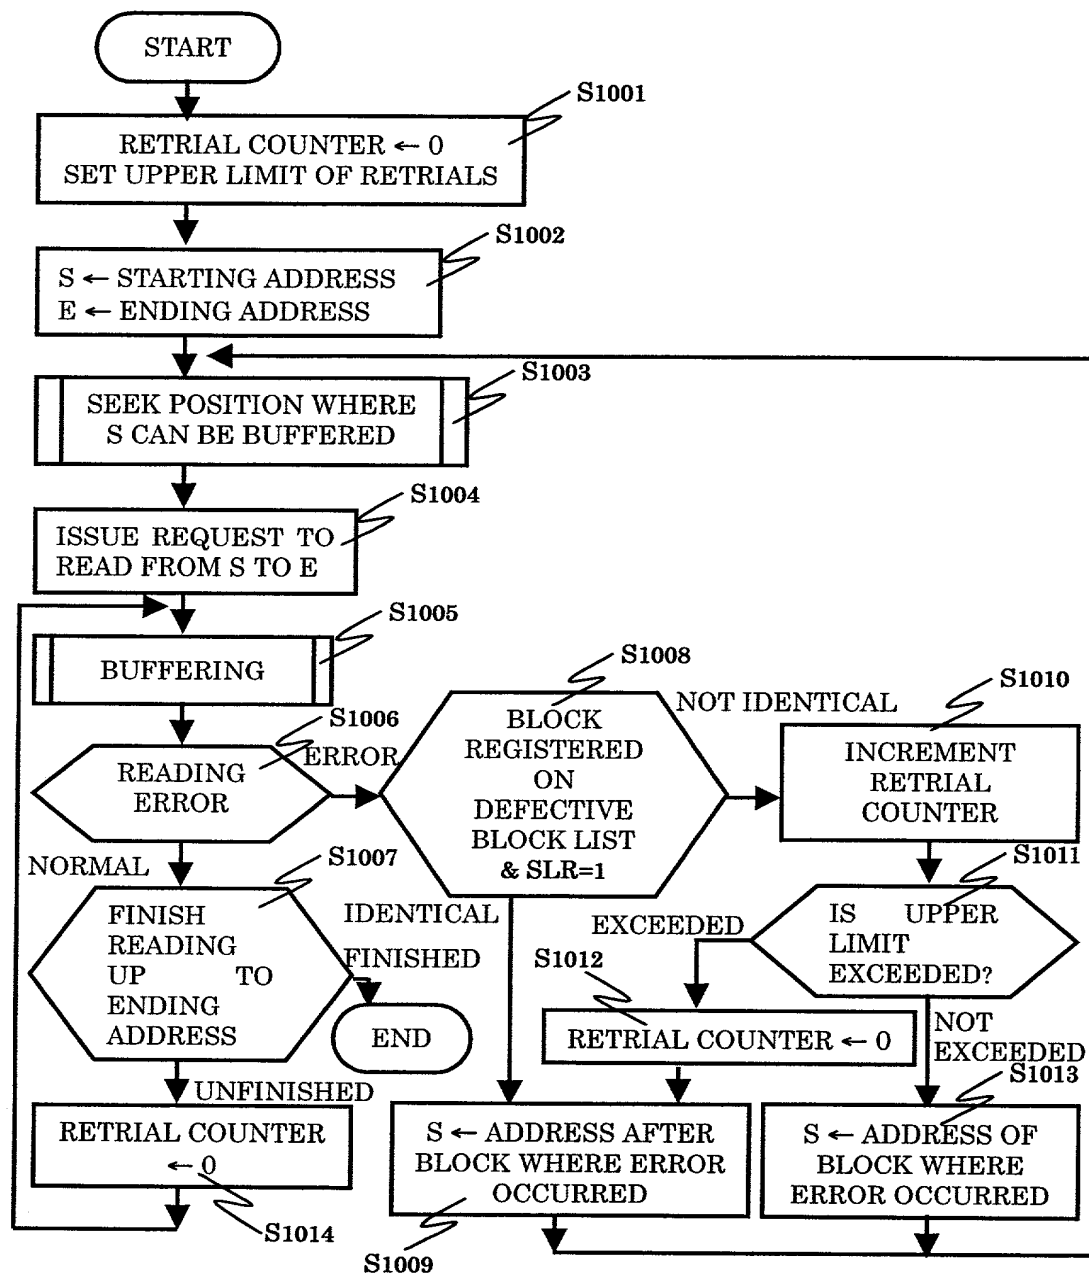


FIG.12

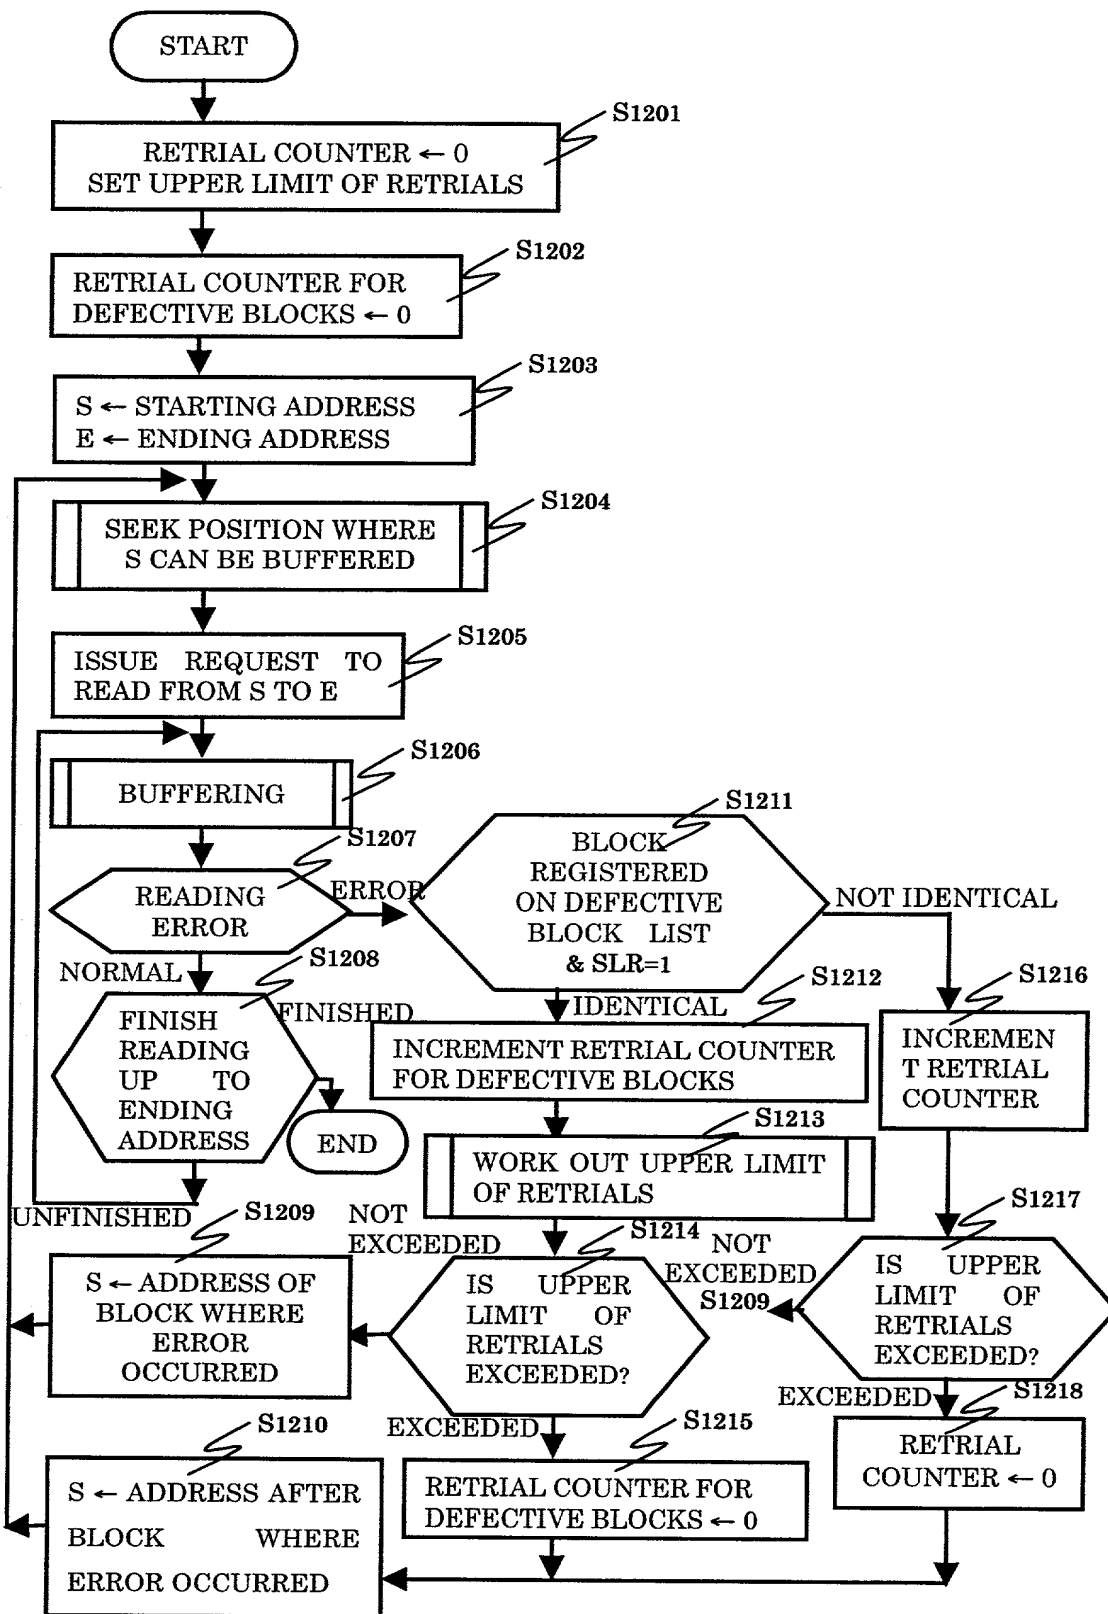


FIG.13

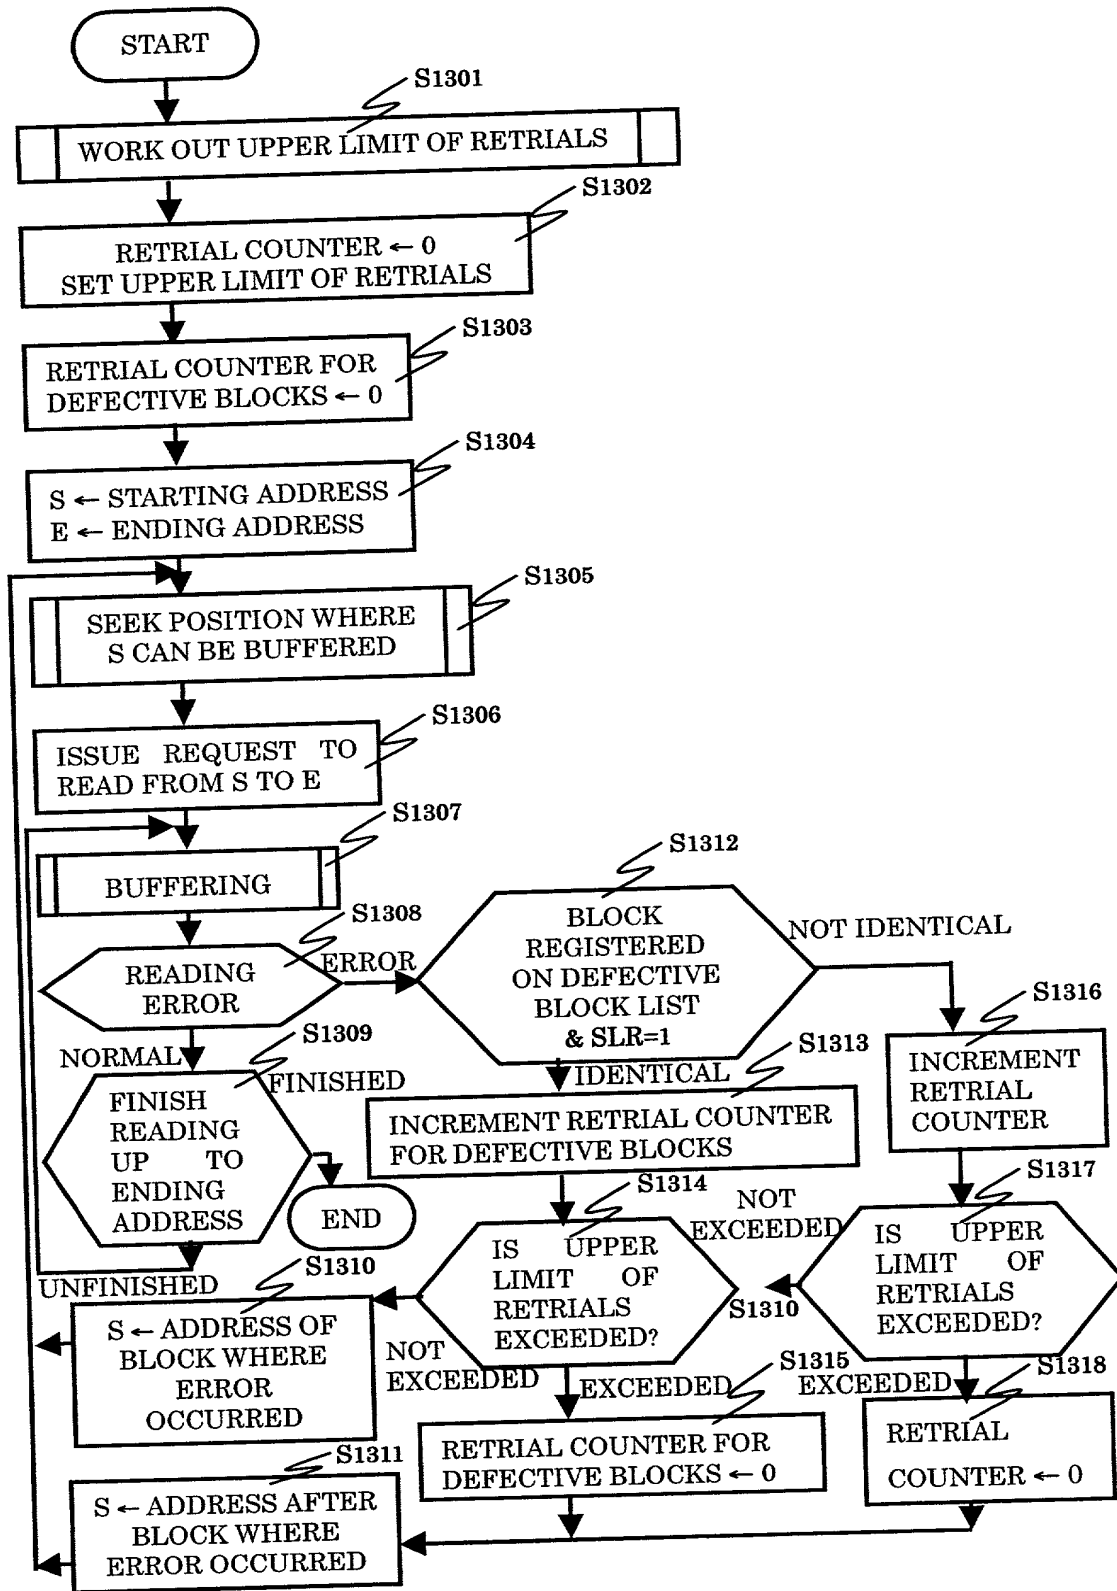


FIG.14

BIT BYTE	7	6	5	4	3	2	1	0
0	CODE VALUE TO INDICATE REPRODUCTION REQUEST							
1								
2	HEAD ADDRESS OF REPRODUCTION DATA							
3								
4								
5								
6	LENGTH OF REPRODUCTION DATA							
7								
8								
9								
10	FLAG INDICATING THAT "REAL TIME REPRODUCTION IS IMPORTANT"		RESERVED AREA					
11								

4.07250" 93559360

FIG.15

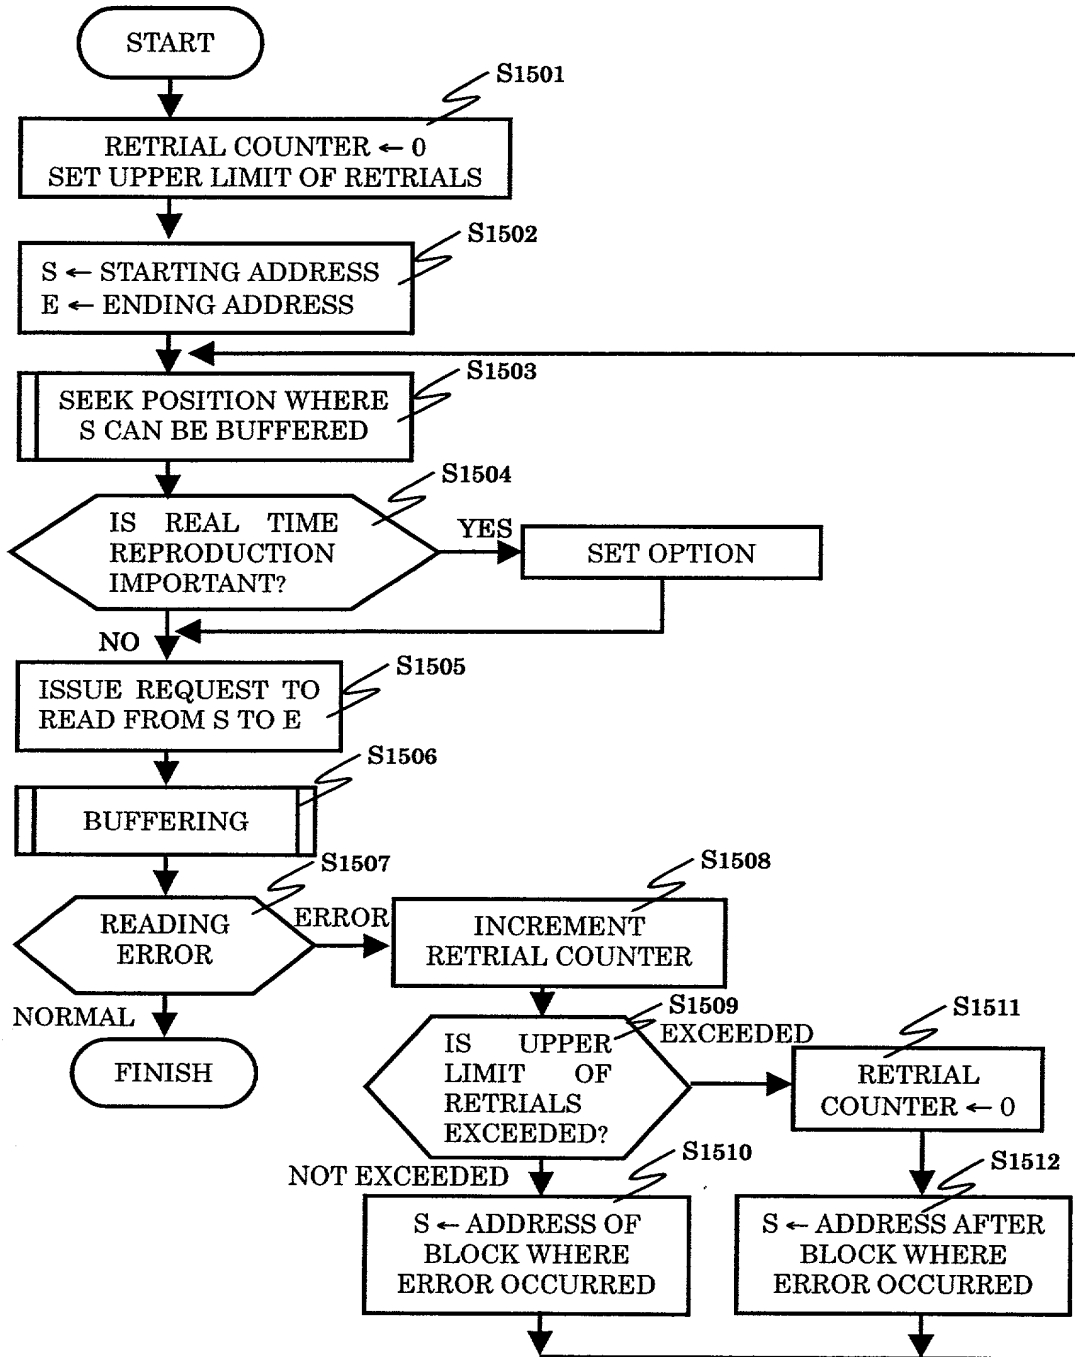


FIG.16

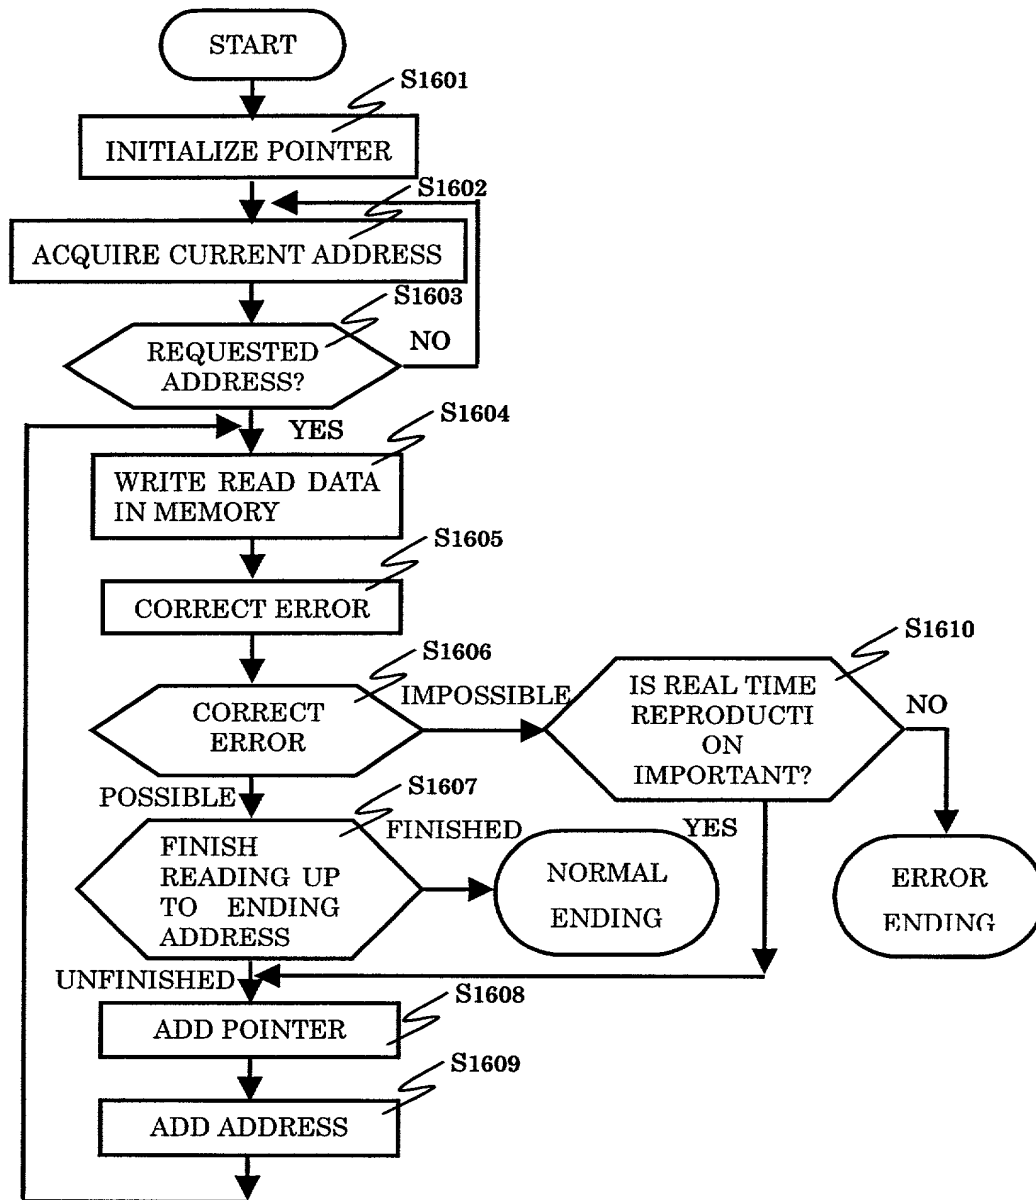


FIG.17

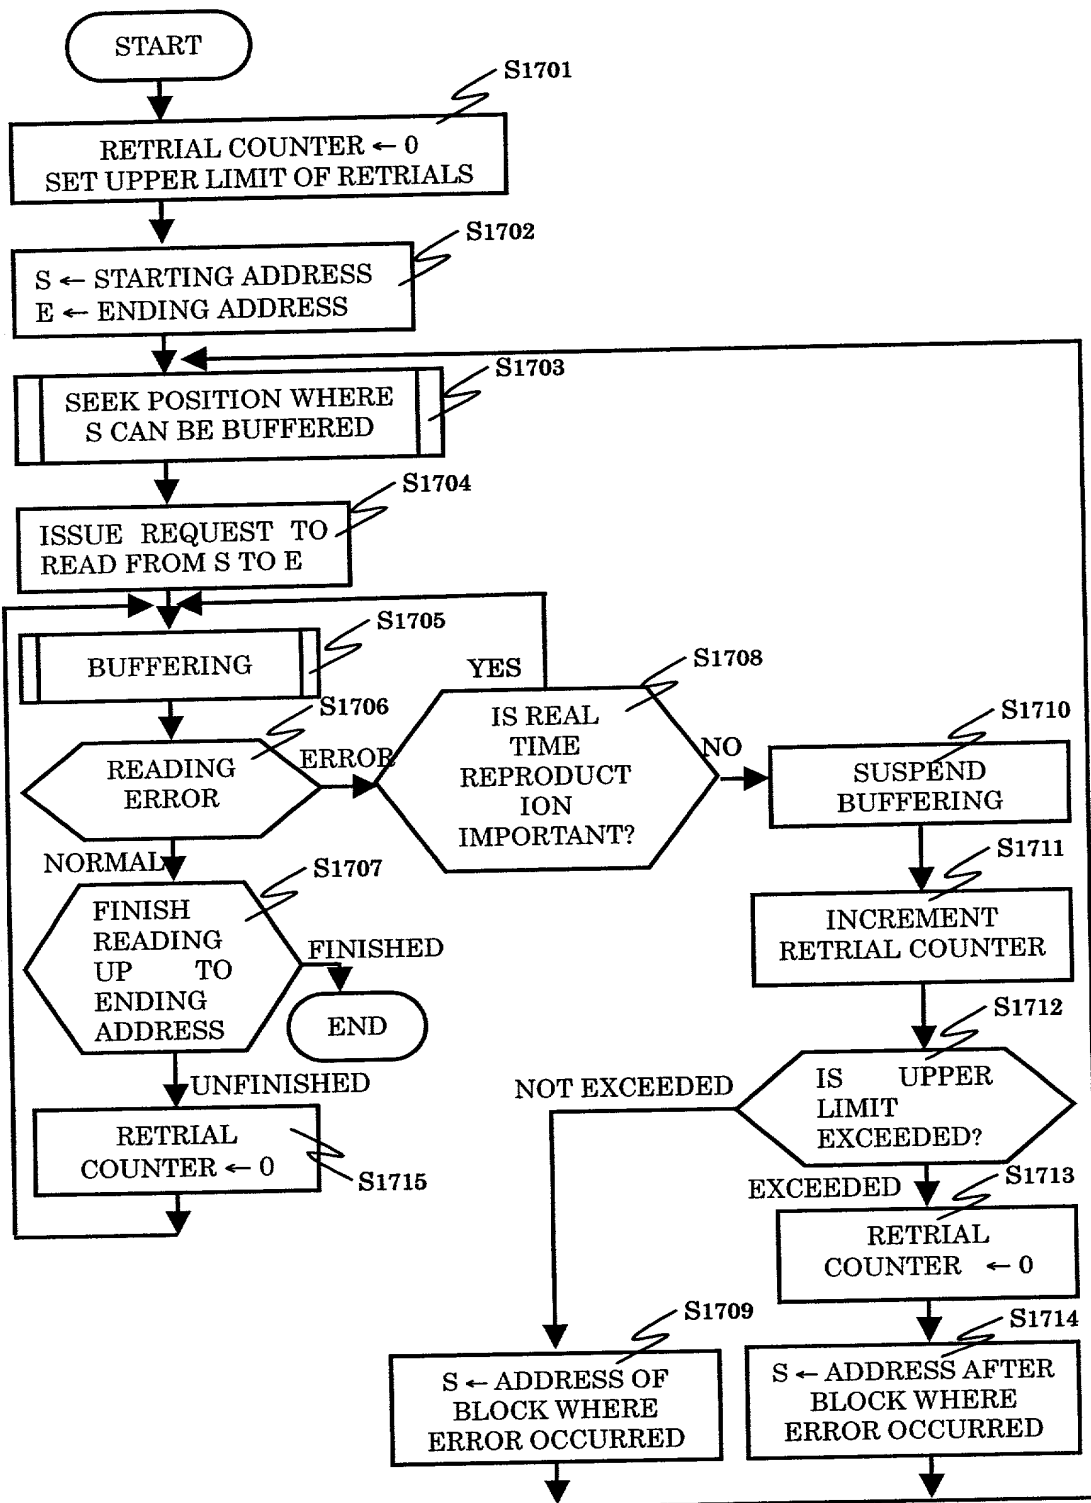


FIG.18

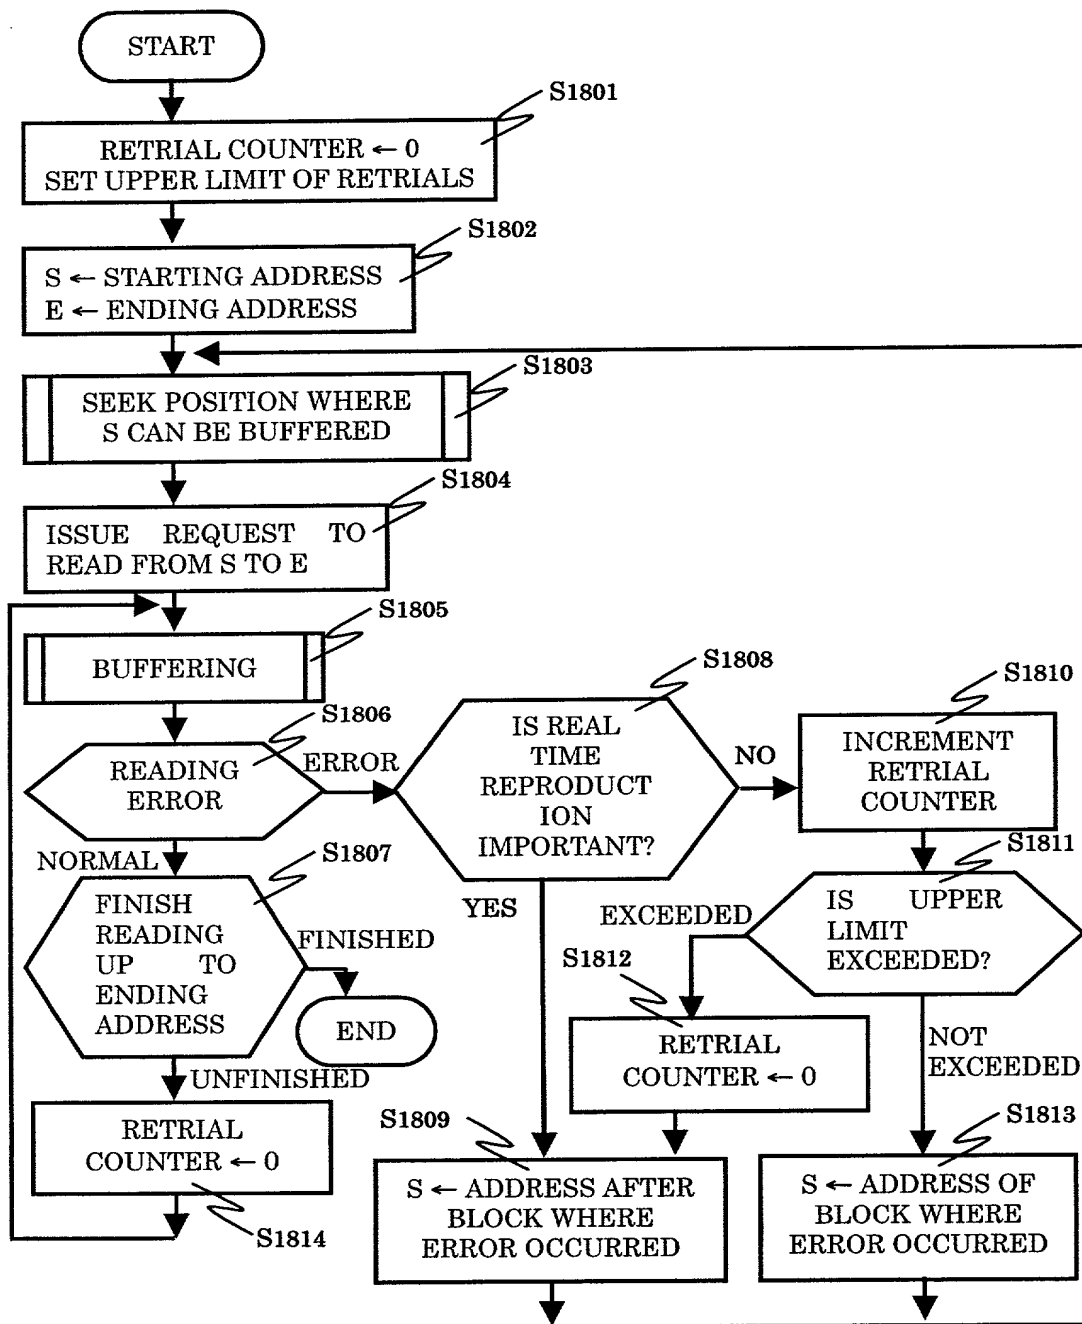


FIG.19

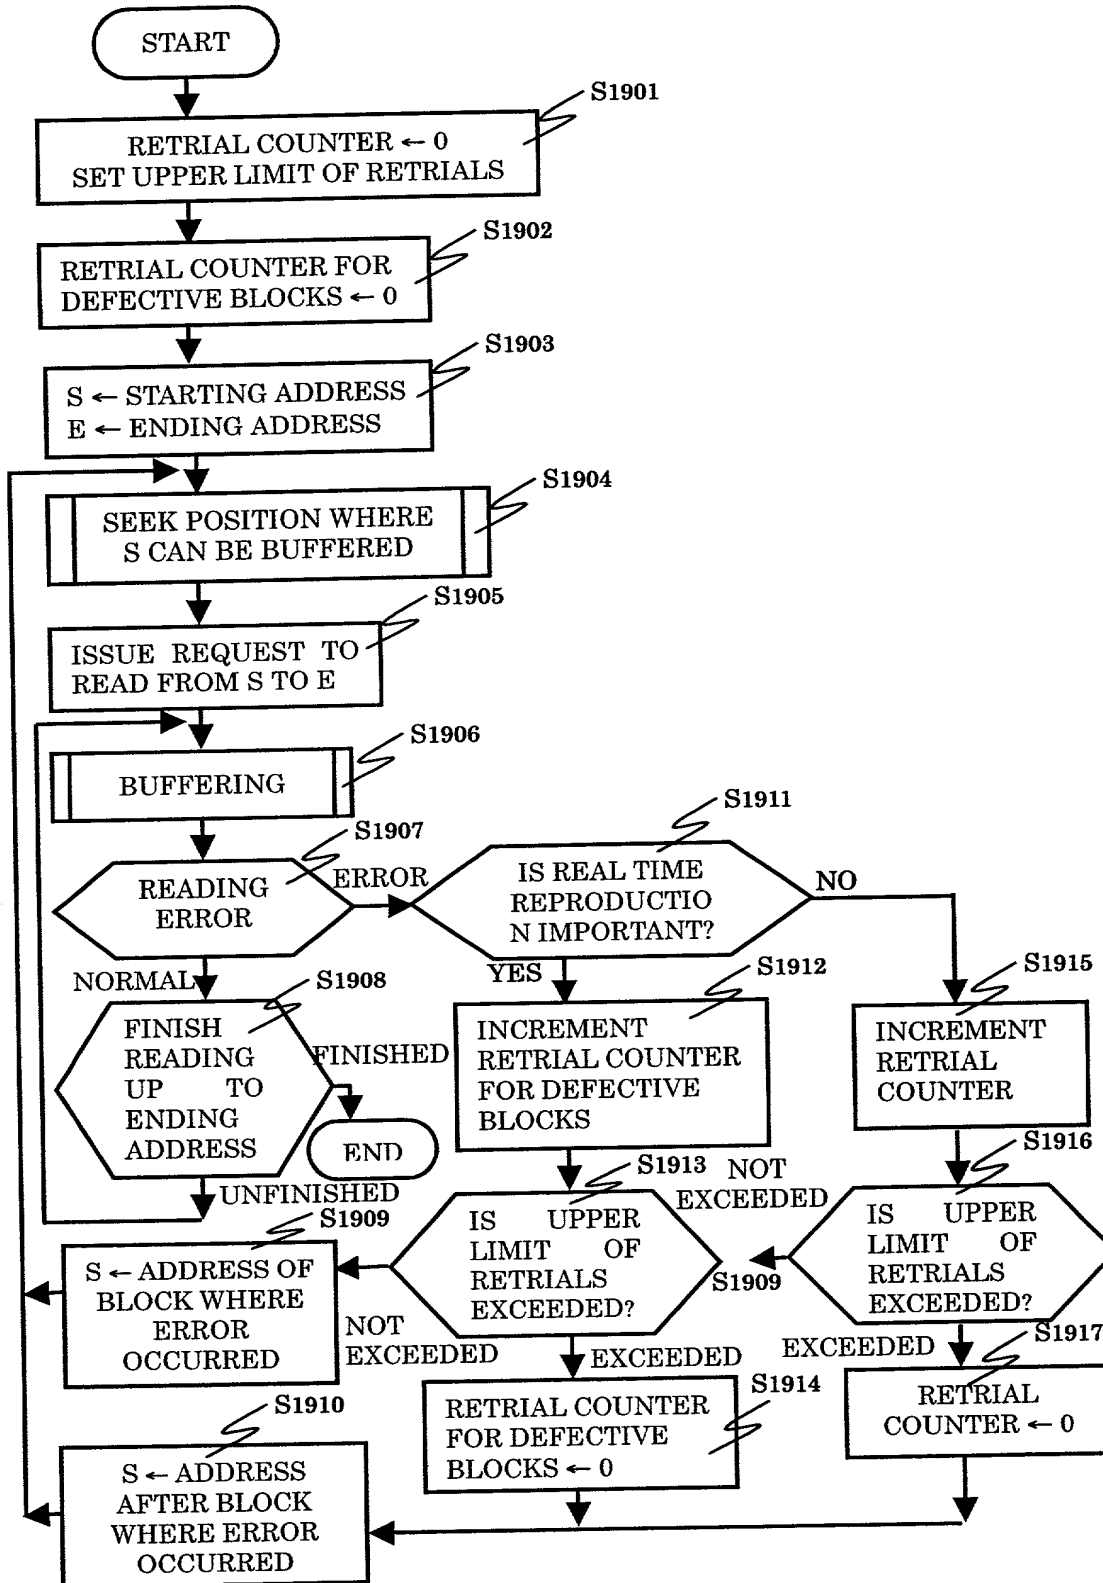


FIG.20

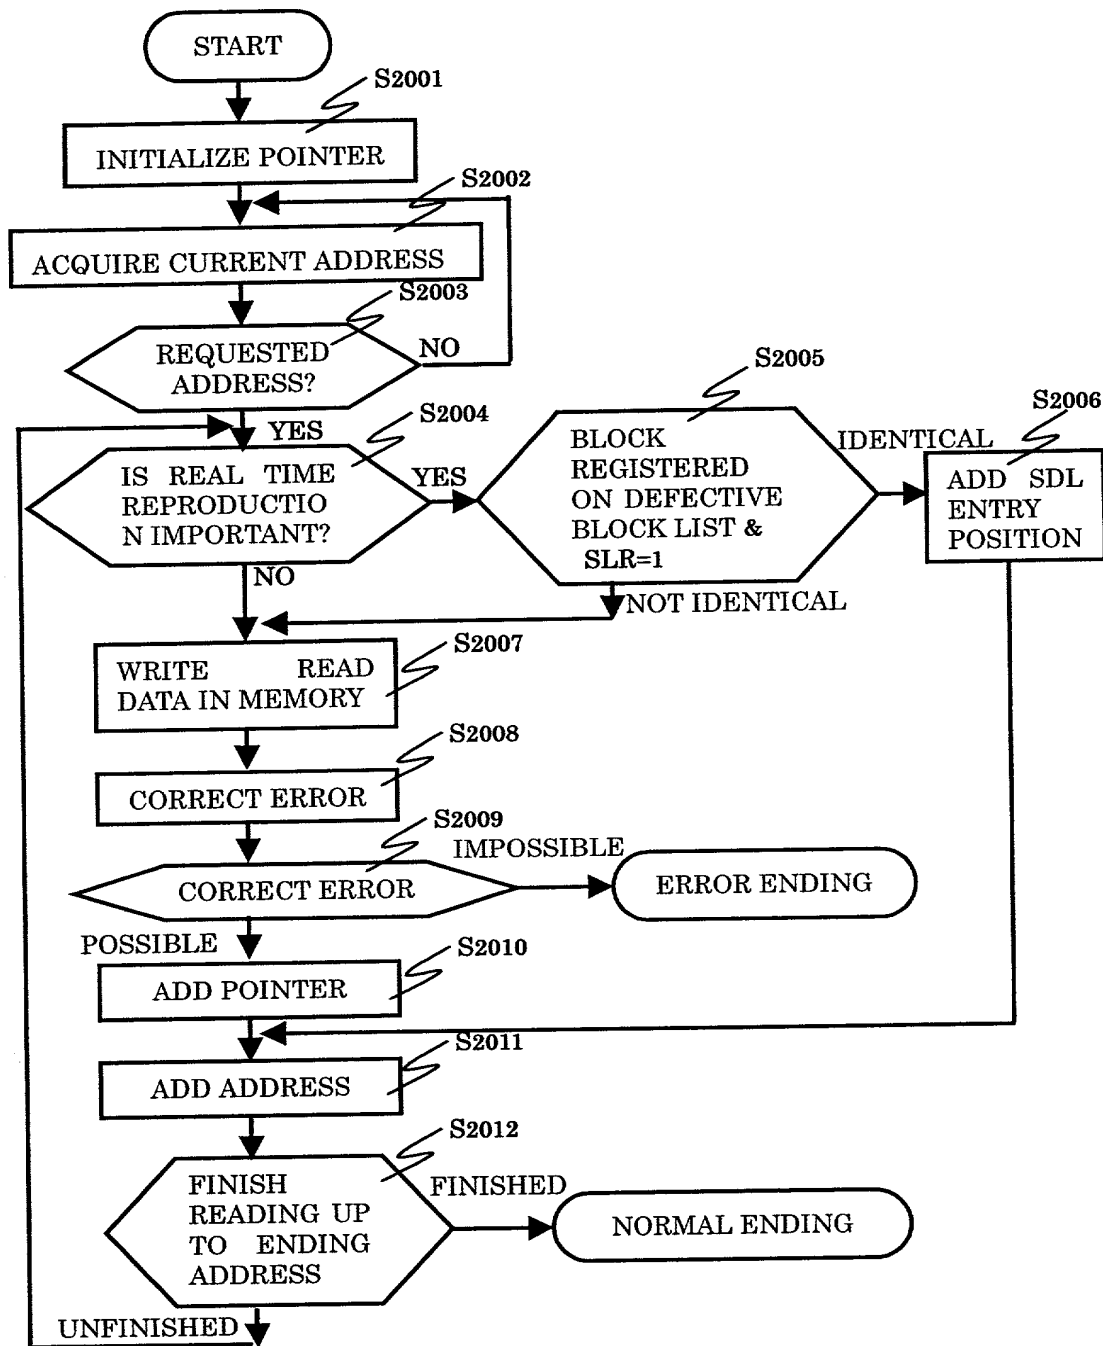


FIG.21

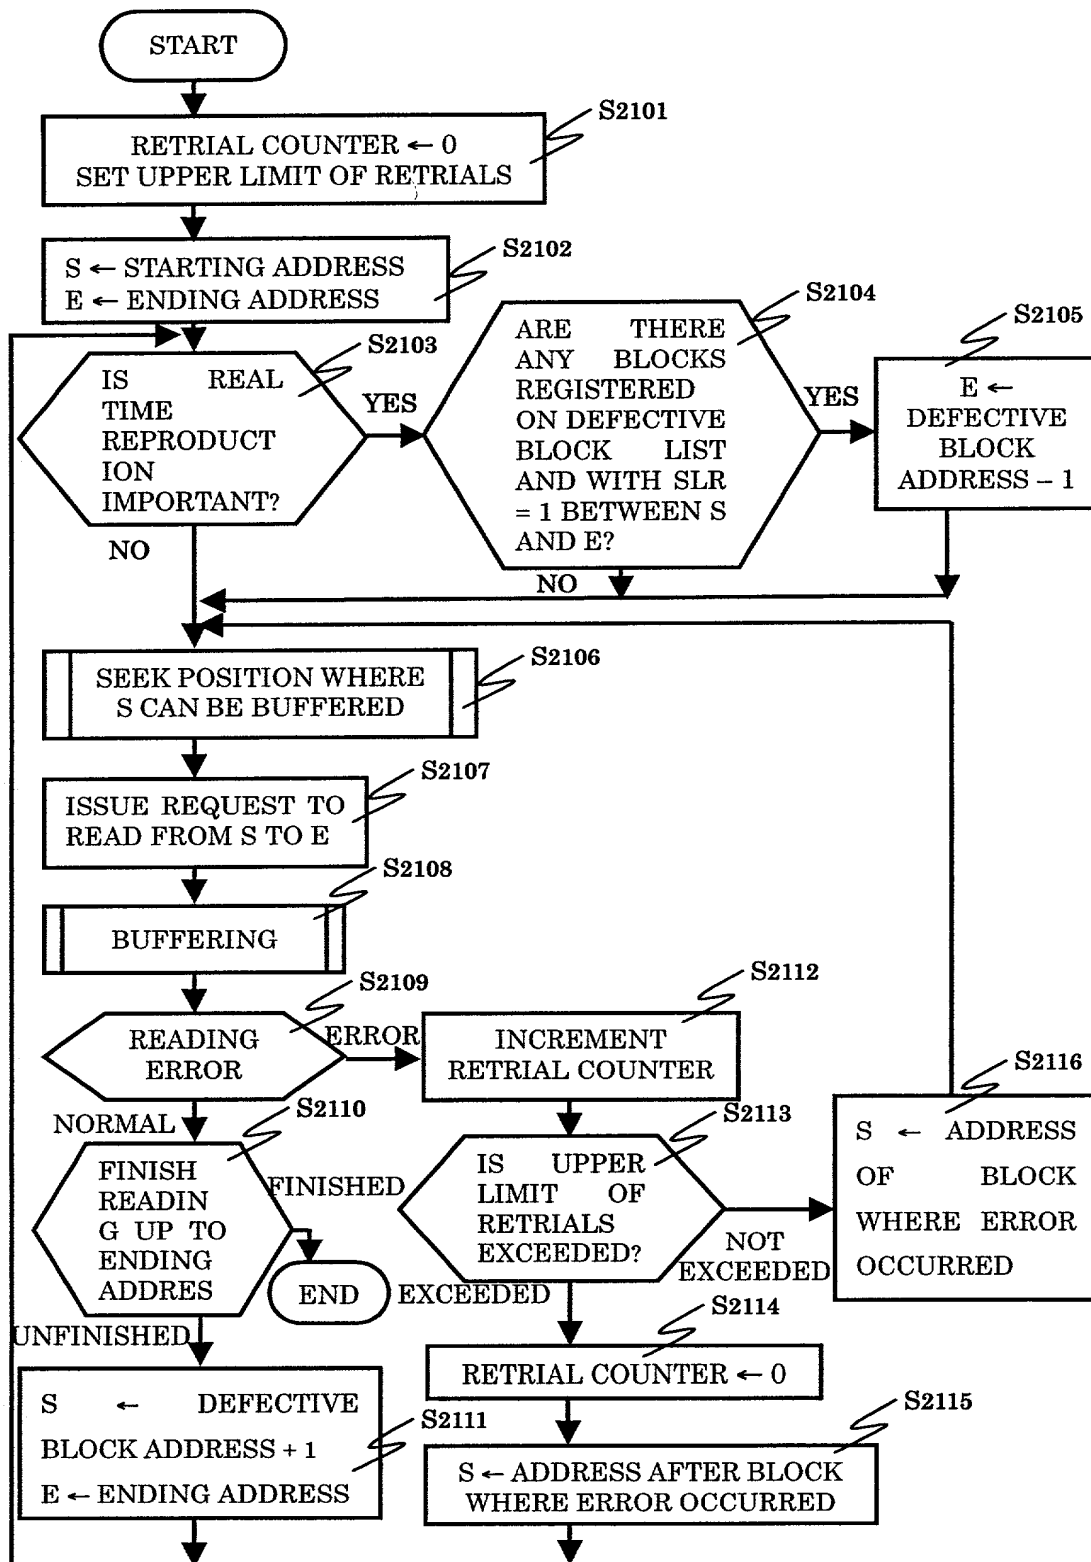


FIG.22

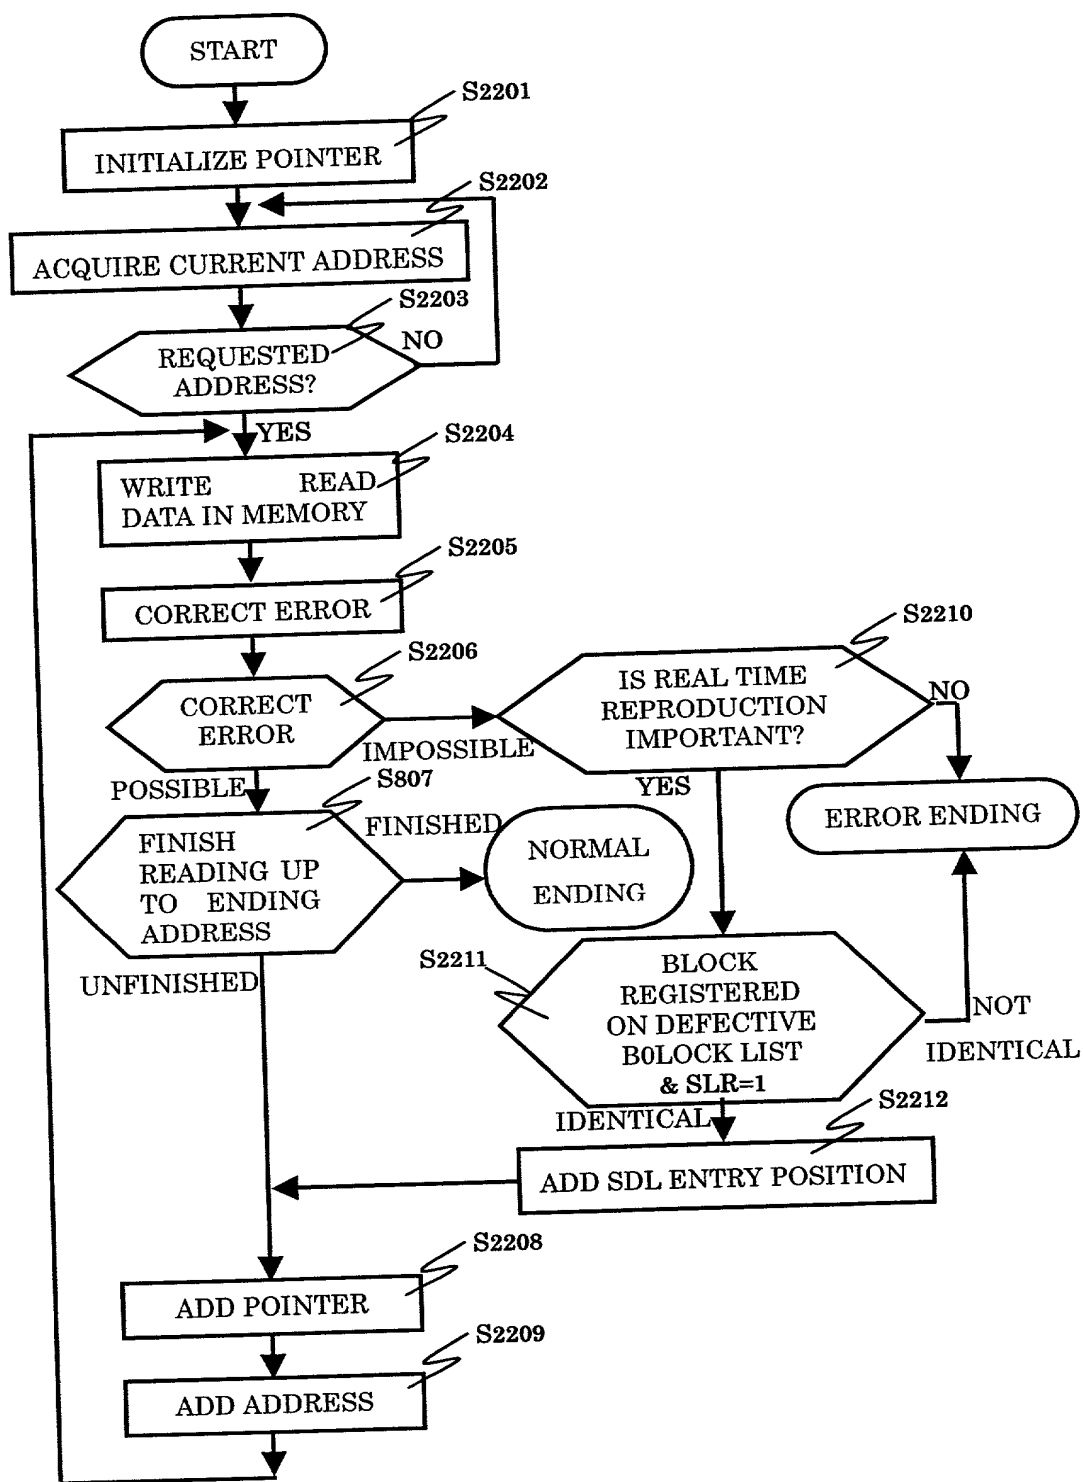


FIG.23


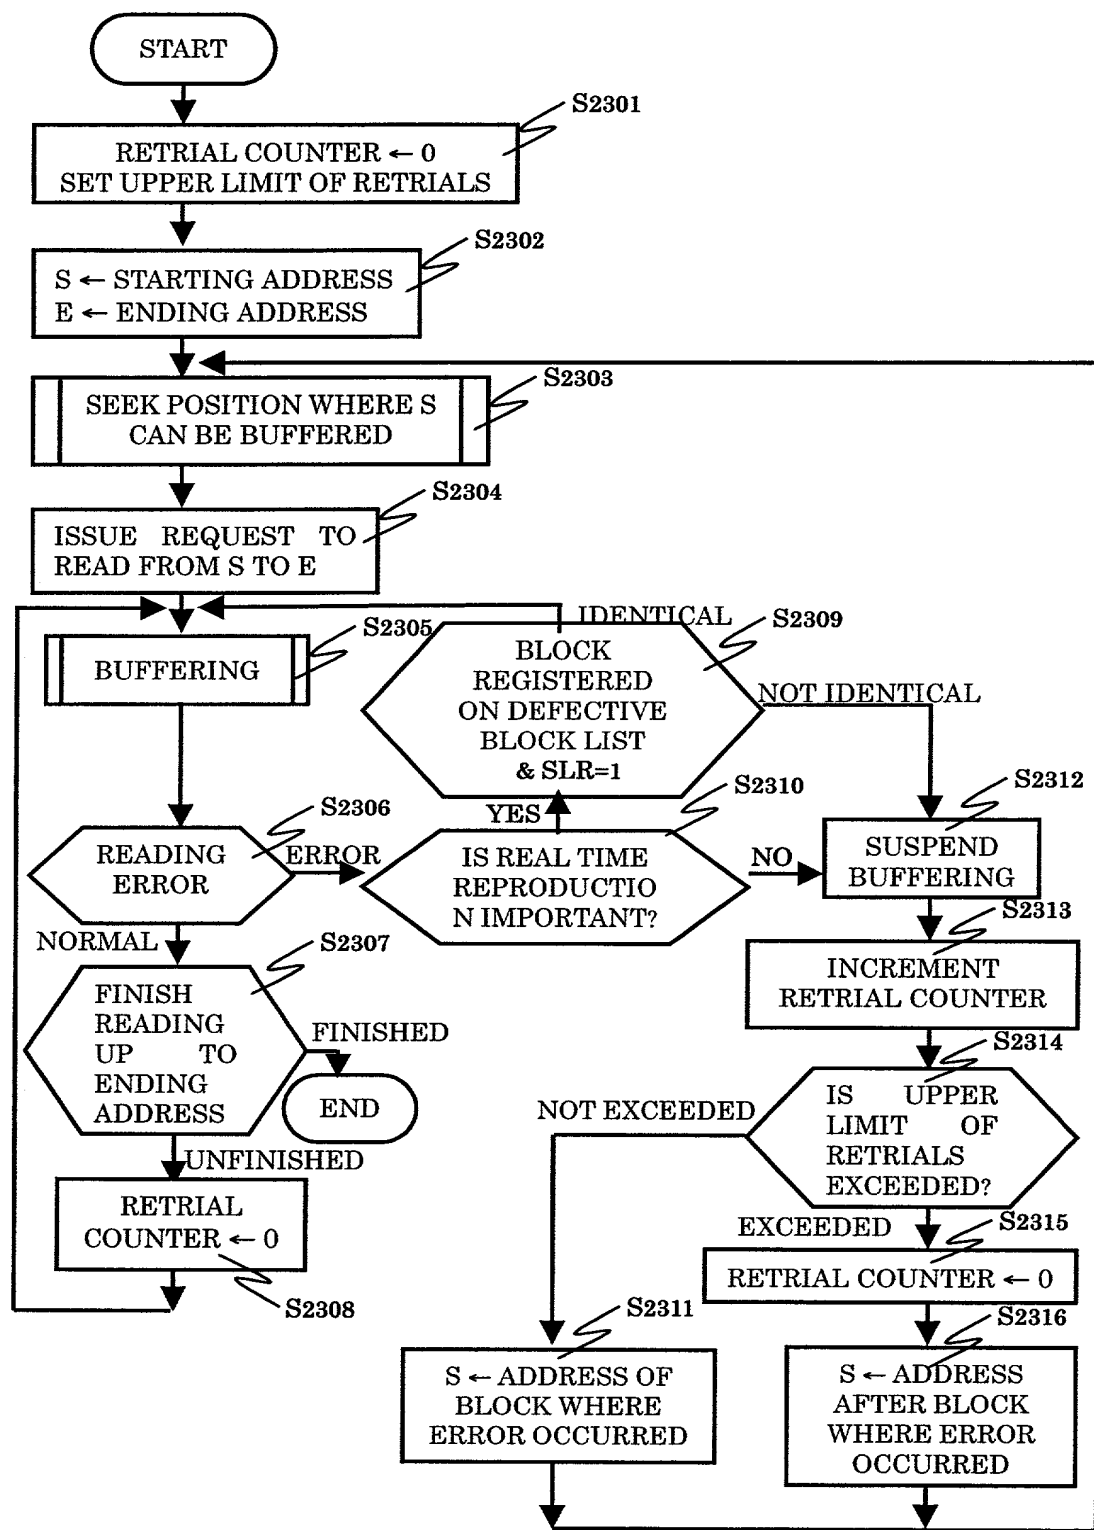


FIG.24

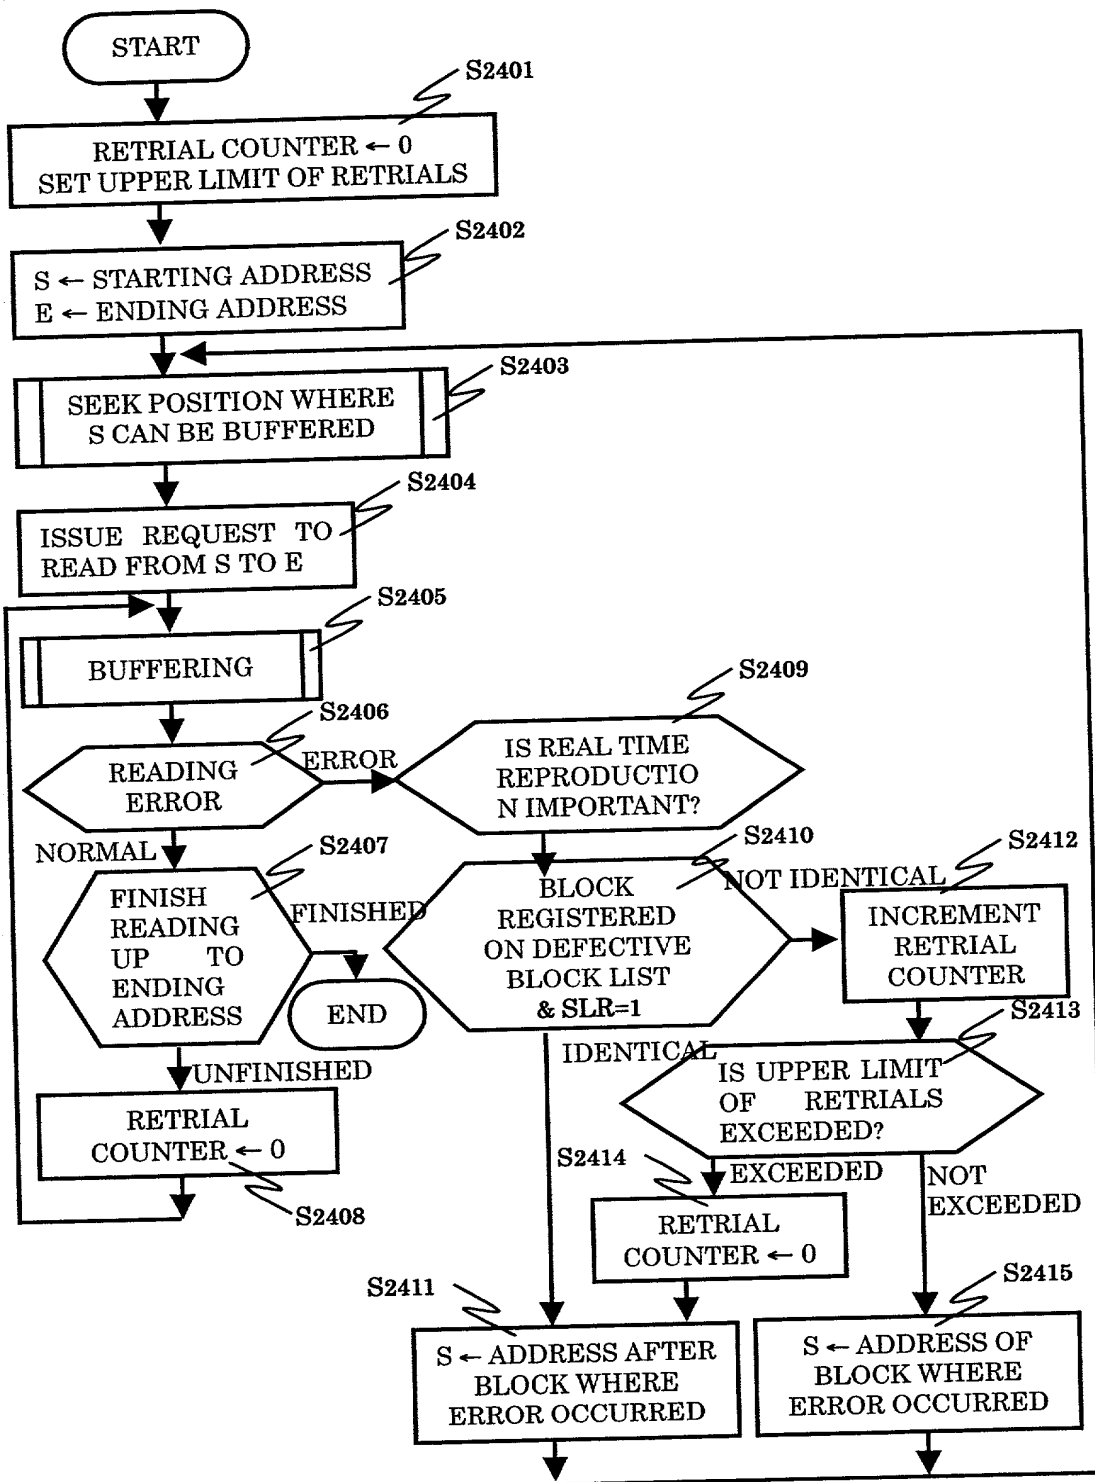

T07250" 98EE9860

FIG.25

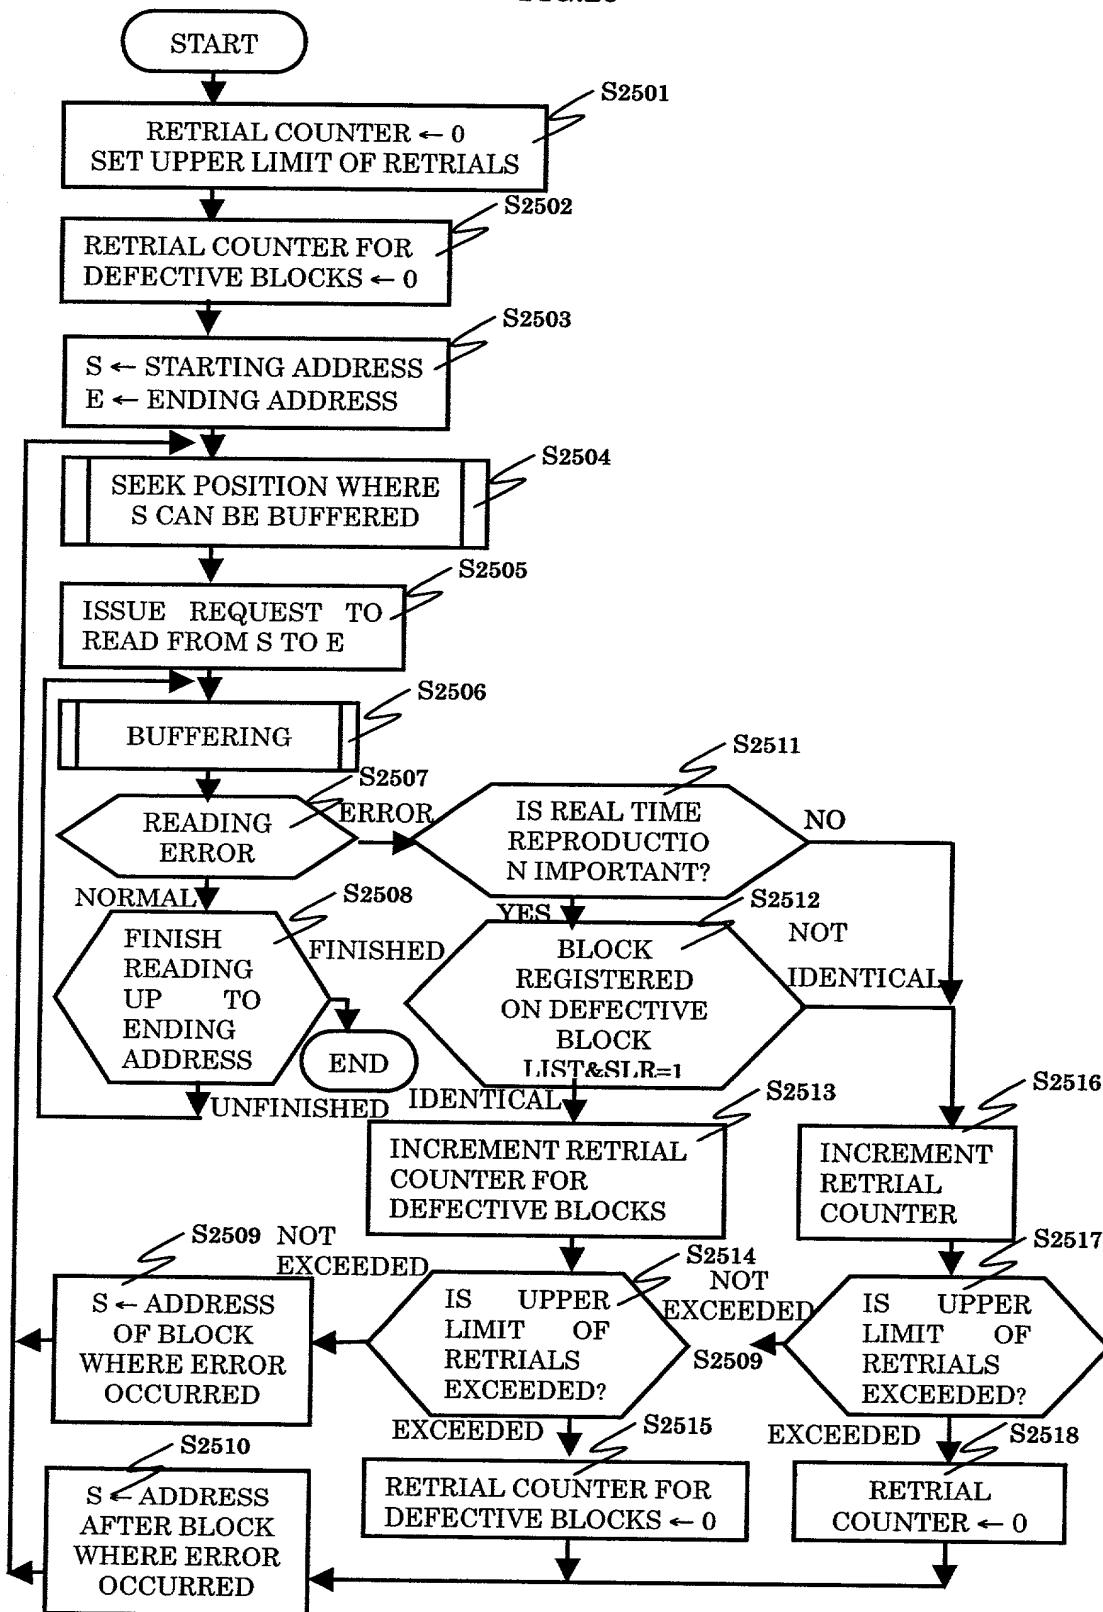


FIG.26

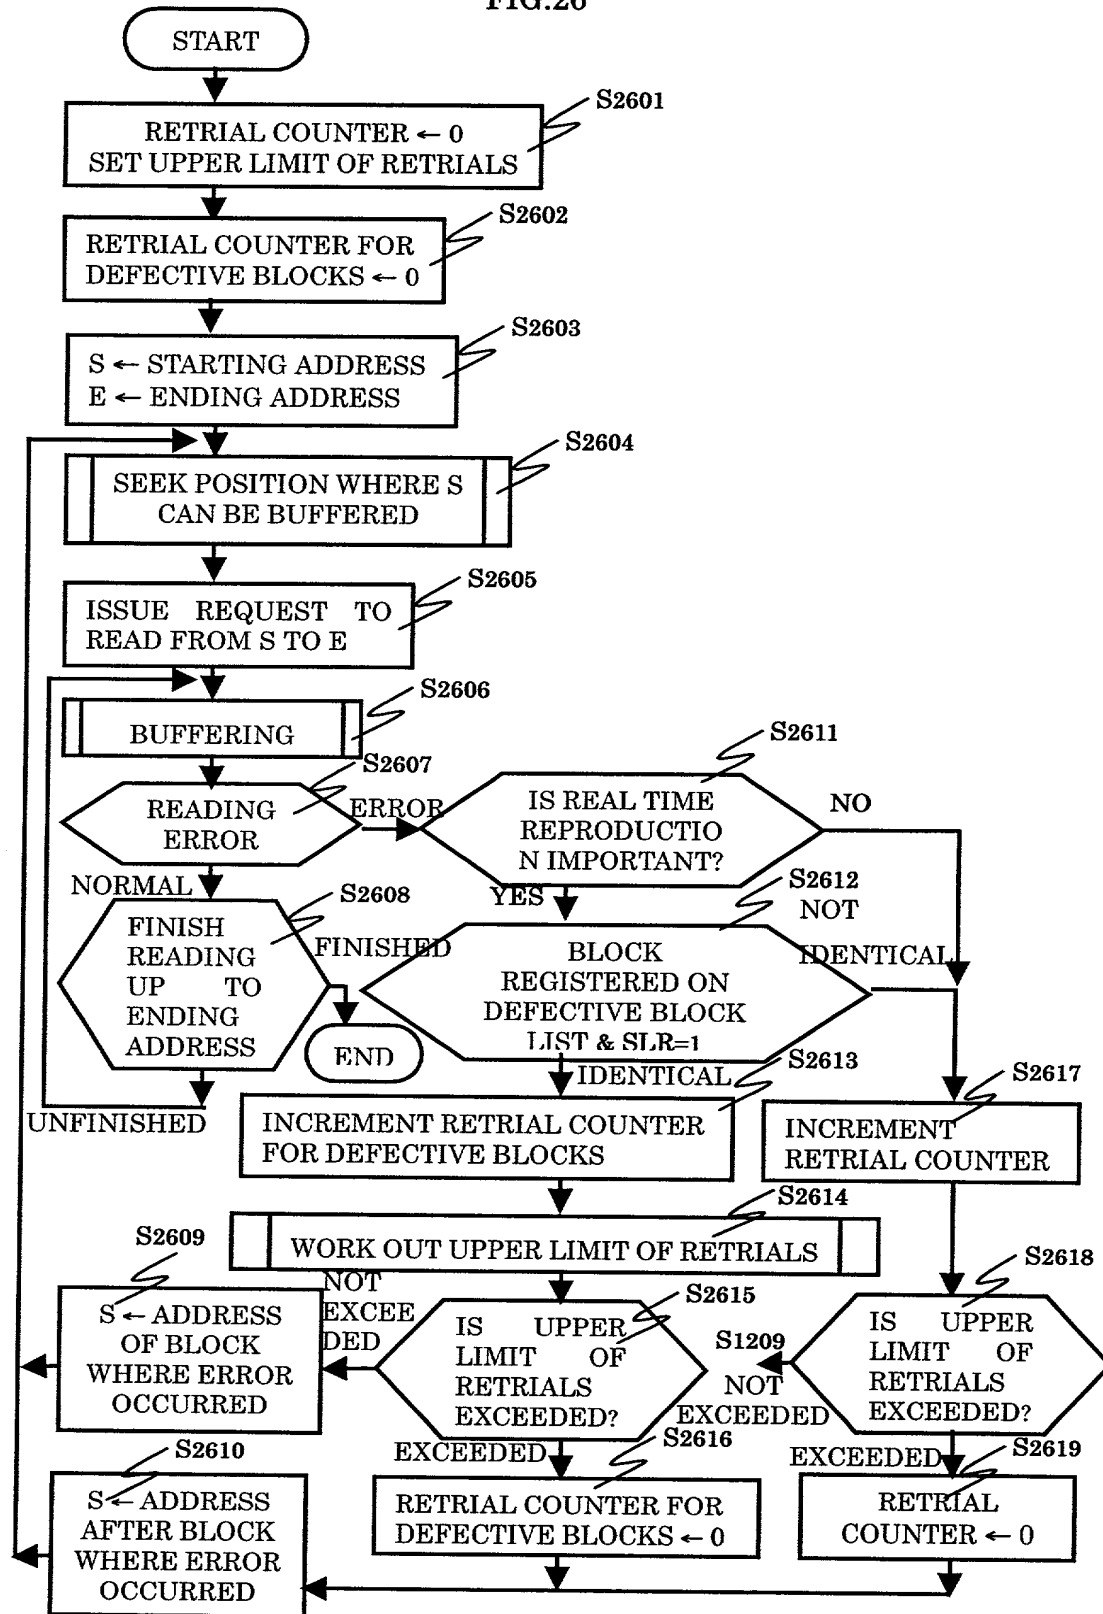


FIG.27

